

# FHC9308S LED Explosion Proof Light(Bracket)



RoHS

LM79

LM84



Ex marking: Ex d IIC T5/T6 Gb  
Ex tD A21 IP66 T95°C/T80°C,IP66

## Application

- Suitable for oil drilling, refining platform, chemical petrol factory, pharmaceutical factory, polishing factory, etc.
- Gas explosive environment: Group IIA,IIB,IIC.
- Zone 1,zone 2;zone 21,zone 22.



## Characteristics

- It is made using a special aluminum housing, all exposed fasteners adopt 304 stainless steel. Using high-tech anti-corrosion surface treatment technology, suitable for long-term highly corrosive environment of offshore oil platforms, oil drilling platform, chlor-alkali, vulcanization cyanide, etc.
- A full range of high conductivity material accelerate convection cooling structure, effective guarantee long-term use in high temperature environments.
- Variety of Light distribution and installation types under one lamp design, an effective solution to beautify workshop and device platform.
- Optoelectronic integrated technology, no dark spot, no ghosting, energy-saving is 60% more than Metal Halide Lamp.
- AC-DC wide voltage and constant power driver, can be long-term used in voltage instability places.
- Quick replay light source without welding.
- Windward area is only 30% of the traditional lamp, suitable for high-altitude winds area.

## Main Specification

Item	Technical Parameters
Input voltage (V)	90~264VAC(30~60W) or 185~264VAC (80W)
	18~43VAC/ 18~55VDC (30~60W)
Rated frequency	50Hz / 60Hz
Light source	LED
Life time (h)	50,000
CRI (Ra)	70 (80 optional)
CCT	5000K(3000K/4000K optional)
Cable entry	M20×1.5, M25×1.5, G3/4", NPT1/2", NPT3/4"
Dimension (mm)	180×230×270
Net weight (kg)	3.7



# FHC9308S LED Explosion Proof Light(Bracket)



## Ordering Reference

Ordering reference	Picture	Rated Wattage (W)	Light output (lm)	Space height ratio	Mounting height (m)	Light distribution curve(1000cd/lm)	Equivalent to
							MH
Input voltage: 90~264VAC(30~60W) or 185~264VAC (80W)							
FHC9308S-L30-60°×80°		30W	3500	1.25	3~6m		70W
FHC9308S-L40-60°×80°		40W	4600				100W
FHC9308S-L50-60°×80°		50W	5600				100W
FHC9308S-L60-60°×80°		60W	6900				150W
FHC9308S-L80-60°×80°		80W	8800				175W
FHC9308S-L30-90°×110°		30W	3300	1.75	3~6m		70W
FHC9308S-L40-90°×110°		40W	4400				100W
FHC9308S-L50-90°×110°		50W	5600				100W
FHC9308S-L60-90°×110°		60W	6700				150W
FHC9308S-L80-90°×110°		80W	8400				175W
FHC9308S-L30-200°		30W	2800	1.75	2~5m		70W
FHC9308S-L40-200°		40W	3700				100W
FHC9308S-L50-200°		50W	4500		100W		
FHC9308S-L60-200°		60W	5400		150W		
FHC9308S-L80-200°		80W	6800		175W		
Input voltage: 18~43VAC/ 18~55VDC							
FHC9308S-L25D-60°×80°		25W	2900	1.25	3~6m		70W
FHC9308S-L40D-60°×80°		40W	4600				100W
FHC9308S-L60D-60°×80°		60W	6900				150W
FHC9308S-L25D-90°×110°		25W	2700	1.75	3~6m		70W
FHC9308S-L40D-90°×110°		40W	4400				100W
FHC9308S-L60L-90°×110°		60W	6700				150W
FHC9308S-L25D-200°		25W	2400	1.75	2~5m		70W
FHC9308S-L40D-200°		40W	3700				100W
FHC9308S-L60D-200°		60W	5400		150W		

Note 1: Lens can be customized 40°, 60°, 80°, 100°




# FHC9308S LED Explosion Proof Light(Bracket)




Drawing of dimension (Dimensions in mm)



Seat mounting





Ceiling mounting



Side wall mounting



Pole mounting

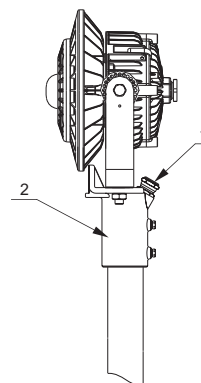

Accessories ordering information(optional)

Ordering reference	Item no	Specification	quantity	note
FHP07	1	Water proof plug M20	1	φ 8~ φ 12mm cable
	2	Vertical Mounting pole	1	φ 40~ φ 50mm pole

