


LED SPOT LIGHT

ITEM NO.: R205A Series

G. Connection


G-1. Signal max connection is 100m, every 100m or 60pcs fixtures need a signal amplifier.

G-2. Optional controller: MASTER PRO、Sunlite、DMX-192C、Madrix and other DMX controller.

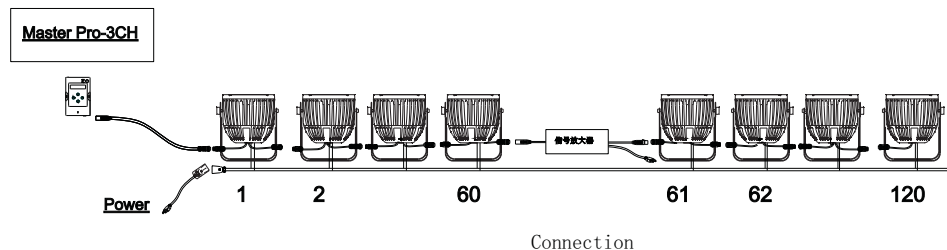

H. Waterproof Treatment

The signal connector(XLR-3) must be sealed with a 20mm thermal shrinking tube(-1), blow and shrink it with a hair driers; thence wrapped with waterproof tape (auto-adhesive, please refer to below instruction for operation) on both side; Blow the second 25mm shrink tube(-2) at last so as to protect waterproof tape under sunshine and guarantee the waterproof validity.

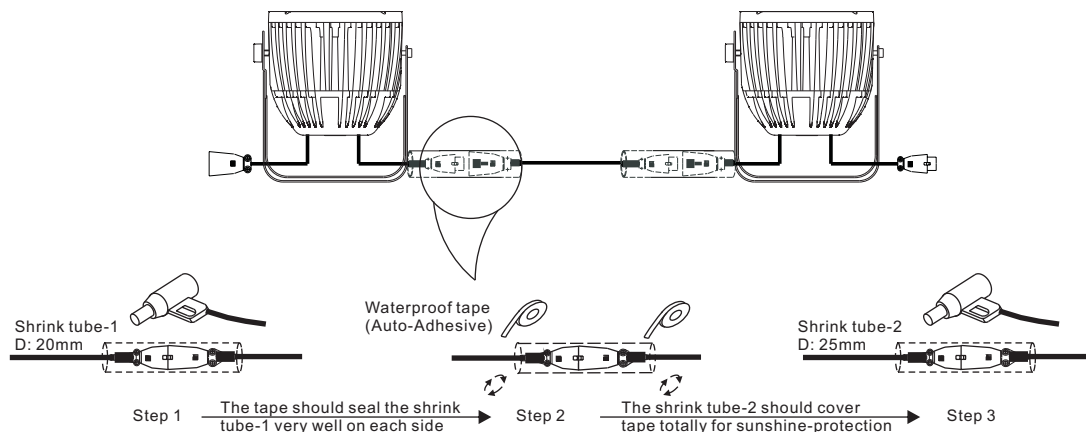

*** Power connector should be treated in the same way if available!!!

Caution:

1. Do not plug them into power when the product is still in package;
2. Don't use anything to cover the fixture during application;
3. Don't use this product in close environment;
4. If this product appears to be damaged, do not attempt any repair, please contact your dealer.

Warning:

- * Neglect on action of the above treatment will lead to failure of waterproof and proper working of the lights!!!
- * Make sure the ground connection well avoid electric shock, due to metal housing.

Product .By. FH Solar & Led Ibérica 

www.fhsolarled.com | info@fhsolarled.com
México .Colombia. Ecuador. España